

IMC-101

1TX to 1MMFX Ethernet Converter



Trend supply the following Ethernet media converter:

IMC-101-M-SC :Industrial10/100BaseT(X) to 100 BaseFX Converter, multi mode, SC connector, 0 to 60 °C


Other options referred to in the data sheet, and other accessories are not supplied.

The attached installation instructions are supplied by Moxa Networking Company Ltd:

For additional information see IMC-101 installation instructions TG200840

This page is left intentionally blank

Trend Control Systems Ltd reserves the right to revise this publication from time to time and make changes to the content hereof without obligation to notify any person of such revisions or changes.

	P.O. Box 34, Horsham, West Sussex, RH12 2YF United Kingdom		Website www.trend-controls.com
	Telephone +44 (0)1403 211888	Fax (International) +44 (0)1403 210982	Fax (UK) +44 (0)1403 241608
E-mail trendinfo@novar.com	Registered office. Novar House 24 Queens Road Weybridge Surrey KT13 9UX Registered in England No 1664519		

Industrial Media Converter IMC-101

Industrial 10/100BaseT(X) to 100BaseFX Media Converter

Features

- Supports Link Fault Pass-Through
- Supports 10/100BaseT(X) auto-negotiation and auto-MDI/MDI-X
- Multi mode, single mode with SC or ST connector available
- Power failure, port break alarm by relay output
- Operating temperature (0 to 60°C), extended operating temperature (-40 to 75°C)
- For hazardous location (Class 1 Div. 2/Zone 2)
- Long-haul transmit distance of 40 km or 80 km



Overview

MOXA Industrial Media Converter, which is specially designed for reliable and stable operation in harsh industrial environments, provides industrial grade media conversion between 10/100BaseT(X) and 100BaseFX. Its reliable industrial design is excellent for keeping your industrial automation applications running continuously, and comes with a relay output warning alarm to help prevent damage and loss.

These products have been designed for harsh industrial

environments, such as in hazardous locations (class I division 2 or zone 2), and comply with FCC, TÜV, UL, and CE standards. IMC-101 series is available in models that support an operating temperature of 0 to 60°C, and an extended operating temperature of -40 to 75°C. They are designed for standard and extended operating temperature ranges, respectively, and are subjected to a 100% burn-in test. These two models meet the needs of industrial automation control.

Link Fault Pass-Through

IMC-101's "Link Fault Pass-Through" feature overcomes a problem encountered when using traditional media converters. The problem is this. When one side of the link fails, the other side continues transmitting packets, and then

waits for a response that never arrives from the disconnected side. What IMC-101 does is force the link to shut down as soon as it notices that the other link has failed, giving the application software a chance to react to the situation.

Redundant Power Inputs

IMC-101 provides two power inputs that can be connected simultaneously to live DC power sources. If one power input

fails, the other source acts as a backup, and automatically satisfies IMC-101's power needs.

Relay Output Alarm by Port Break, Power Failure

IMC-101 provides relay contact outputs to warn technicians on the shop floor when the power fails or a port link is

disconnected, so they can respond quickly with appropriate emergency operation procedures.

Specifications

Technology

Standards: IEEE802.3, 802.3u, Link Fault Pass-Through

Interface

RJ45 ports: 10/100BaseT(X)

Fiber ports: 100BaseFX (SC, ST connectors available)

LED Indicators: Power, Fault, 10/100, Full/Half Duplex, Collision

Dip Switch: 100BaseFX Full/Half duplex selection, Port break alarm mask

Alarm Contact: One relay output with current carrying capacity of 1A @ 24 VDC

Optical Fiber

Distance: Single mode fiber for 15 km, Multi mode fiber for 2 km

Wavelength: 1310 nm

Min. TX Output: -20 dBm (IMC-101-M),
-15 dBm (IMC-101-S)

Max. TX Output: -14 dBm (IMC-101-M),
-6 dBm (IMC-101-S)

Sensitivity: -36 to -32 dBm (IMC-101-M),
-34 to -32 dBm (IMC-101-S)

Recommended Diameter: 9/125 μm(Single)
62.5/125 μm(Multi)

Power

Input Voltage: 12 to 48 VDC; Redundant inputs

Input Current (@24V): 0.2A

Connection: Removable Terminal Block

Overload Current Protection: 1.1A

Reverse Polarity Protection: Present

Mechanical

Casing: IP30 protection, metal case

Dimensions (W x H x D): 53.6 x 135 x 105 mm

Weight: 0.63 kg

Installation: DIN-Rail, Wall Mounting

Environment

Operating Temperature: 0 to 60°C (32 to 140°F)

-40 to 75°C (-40 to 167°F) for -T models

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 90% (non-condensing)

Regulatory Approvals

Safety

UL60950, UL 508, CSA C22.2 No. 60950, EN60950

Hazardous location:

UL/cUL Class1, Division 2, Groups A, B, C and D

ATEX Class1, Zone 2, EEx nC IIC

EMI:

FCC Part 15, CISPR (EN55022) Class A,

EMS:

EN61000-4-2 (ESD), level 3

EN61000-4-3 (RS), level 3

EN61000-4-4 (EFT), level 3

EN61000-4-5 (Surge), level 3

EN61000-4-6 (CS), level 3

Shock: IEC60068-2-27

Free Fall: IEC60068-2-32


Vibration: IEC60068-2-6

MTBF: 810,000 hrs

Data Base: MIL-HDBK-217F, GB

WARRANTY: 5 years

Dimensions

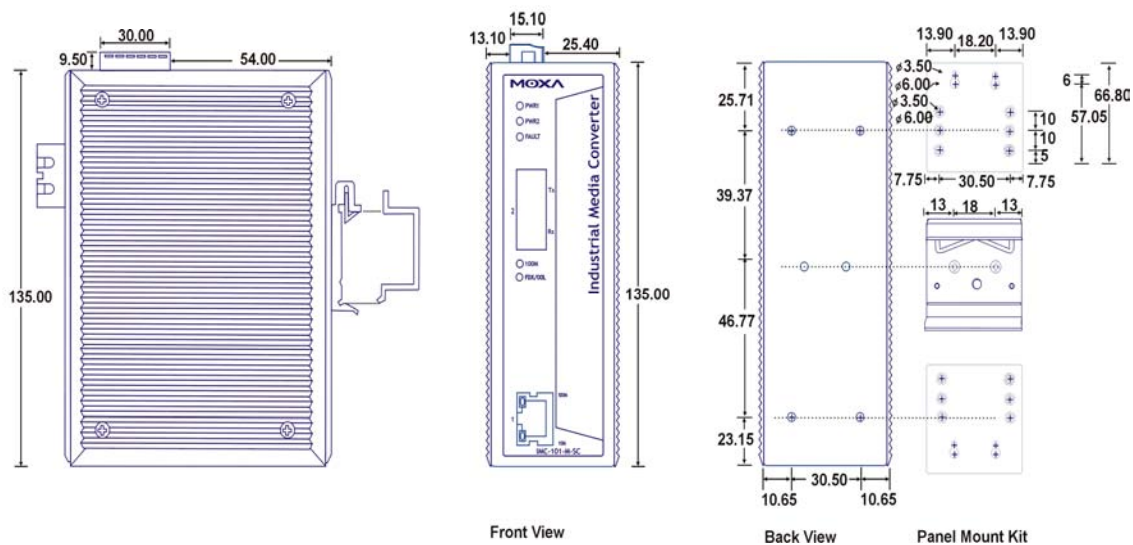

Ordering Information

IMC-101-M-ST: Industrial 10/100BaseT(X) to 100 BaseFX Media Converter, multi mode, ST connector, 0 to 60°C

IMC-101-S-SC: Industrial 10/100 BaseT(X) to 100 BaseFX Media Converter, single mode, SC connector, 0 to 60°C

Extended Operating Temperature Models (-40 to 75°C)

IMC-101-M-SC-T: Industrial 10/100BaseT(X) to 100BaseFX Media Converter, multi mode, -40 to 75°C

IMC-101-M-ST-T: Industrial 10/100BaseT(X) to 100 BaseFX Media Converter, multi mode, -40 to 75°C

IMC-101-S-SC-T: Industrial 10/100 BaseT(X) to 100 BaseFX Media Converter, single mode, -40 to 75°C

Long haul transmit for Single mode optical fiber of 40 km and 80 km are also available.

Optional Accessories

WK-46: Wall Mounting Kit

* All items include: User's Manual